

800x2400mm / 15mm

Perfect size that maximize your aspiration





Perfect-size of tiles and modular formats for any flooring or wall, but also for dressing a design, with everything can be made, from the walls of a skyscraper to a garden table. **OUR** Smart Solid Surface so innovative and versatile that they break down the barriers between surfaces for architecture and furnishing, between indoor and outdoor use. The freedom to design grows, with solutions that were impossible until yesterday.


SHADES OF NATURE WITH MATT AND GLOSSY FINISH

Eight colours, a single modular 800x2400mm size, a selection of Natural shades reflect today's taste. Make way for colour, for shades, for glossy and matt surfaces, with cracking effects and for decorations that in the form of combinations, matches, lights and shadows, play with lively elegance within space,





Variant options for Maximize your style

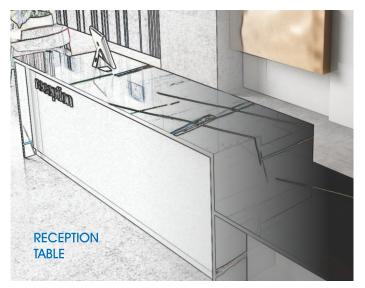

APPLICATION AREAS:



Unit Top

Ħ

Table Top

	⊕
D	oor/window

Frame

ß



Furniture





	,
Wash	Basin





Outdoor

Area

Step & Riser

#‡ ////

Traffic Area



√ [™] >¥

¥ پین

An old soul, a modern styling. The veins and fascination of marble are unchanged, what changes is the space, which is more modern and releases the creative identity of the material in variant application like reception table, stair case, Bath tub, Furniture, Etc, through a contemporary perspective. Eight colours, two surfaces (glossy and matt) available in 800x2400mm size elegantly emphasize the designs, establishing an inseparable bond between styling and architecture.



CASE

Bath Tub



Flooring Heavy Door Frame



Living Area

Indoor Sitting

h Ľ

Office Table

Counter Top



TILE THAT BUILT TO PERFORME

Stunning Visual Paired with touchable textures that don't freeze, fade or crack.

FEATURES :

Making the large size slab tiles in various size, range and with bigger, durable & natural surface you have ever seen. Nothing can be compared with beauty of Arlo Fullbody Tiles.



High



Dimensional stability



Ĵ.

Slip

resistance





Eco




Easy to clean




Maintenance

EDGE PROFILES

OUR designs are available in glossy and Matt finishes and different types of edge profiles to expand your design options. Offering unmatched durability with no maintenance, easy-care convenience, and superior stain resistance, we back our surfaces with a transferable Full Lifetime Warranty to ensure years of flawless service.

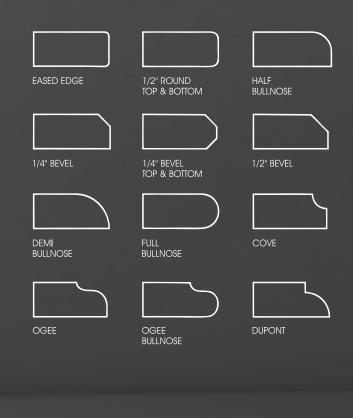



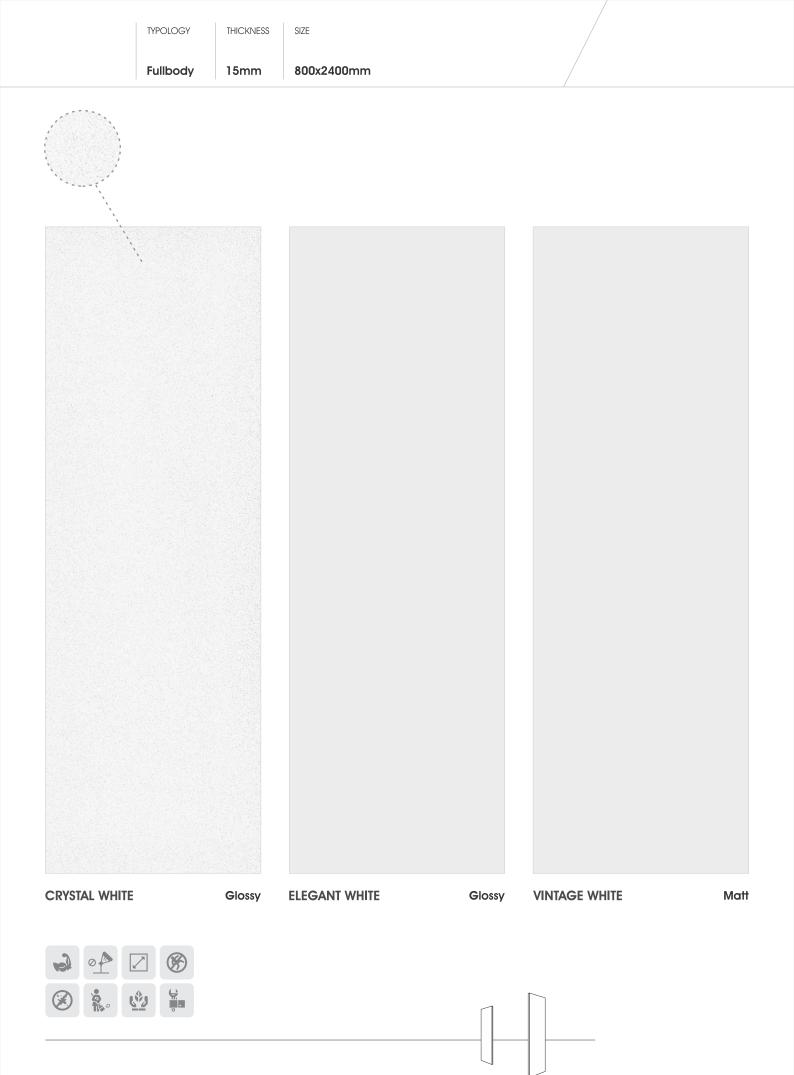

		I IICKNESS		
	Fullbody	15mm	800x2400mm	
00				
		1		1
				t
				ĕ
				asp
				2
				Ke
				e e
				<u> </u>
				lior
		ener.		
		11-1-20		ether the perfection in every aspect
				کم ک
	<u>L</u>			Je l
				<i>B</i>

THICKNESS SIZE

TYPOLOGY



Crystal White

TYPOLOGY	THICKNESS	SIZE	
Fullbody	15mm	800x2400mm	

GRAFITO BLACK

Glossy

GRAFITO CHIPS

Glossy

LARIX BLACK

Matt




TYPOLOGY

THICKNESS

SIZE

Grafito Chips

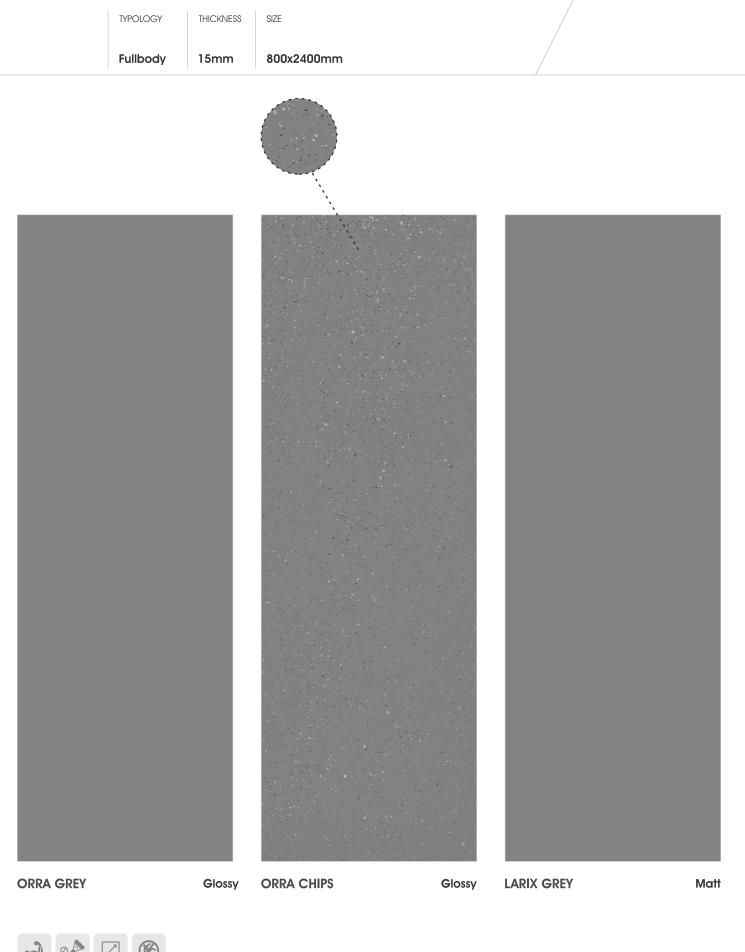





TYPOLOGY

Fullbody

THICKNESS

15mm


SIZE

800x2400mm

TYPOLOGY	THICKNESS	SIZE	
Fullbody	15mm	800x2400mm	





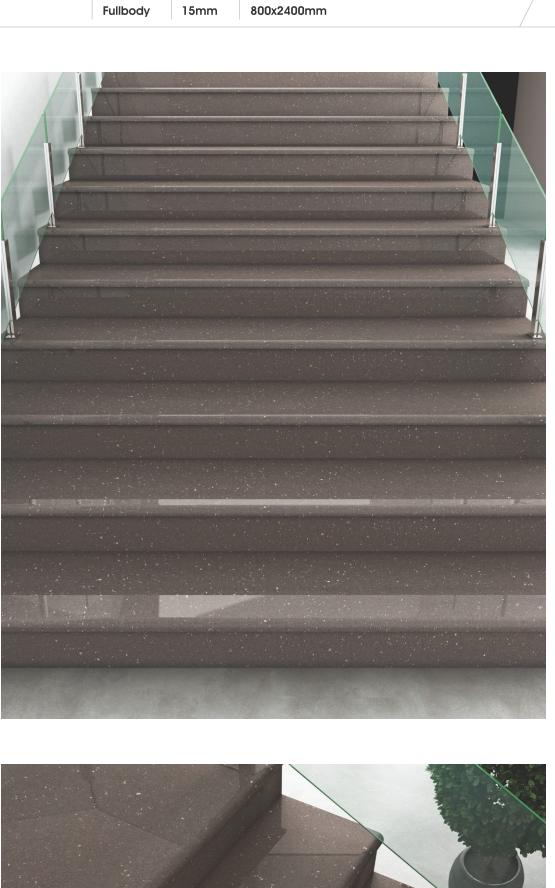



letwe the — perfection in every aspect

TYPOLOGY

THICKNESS


SIZE

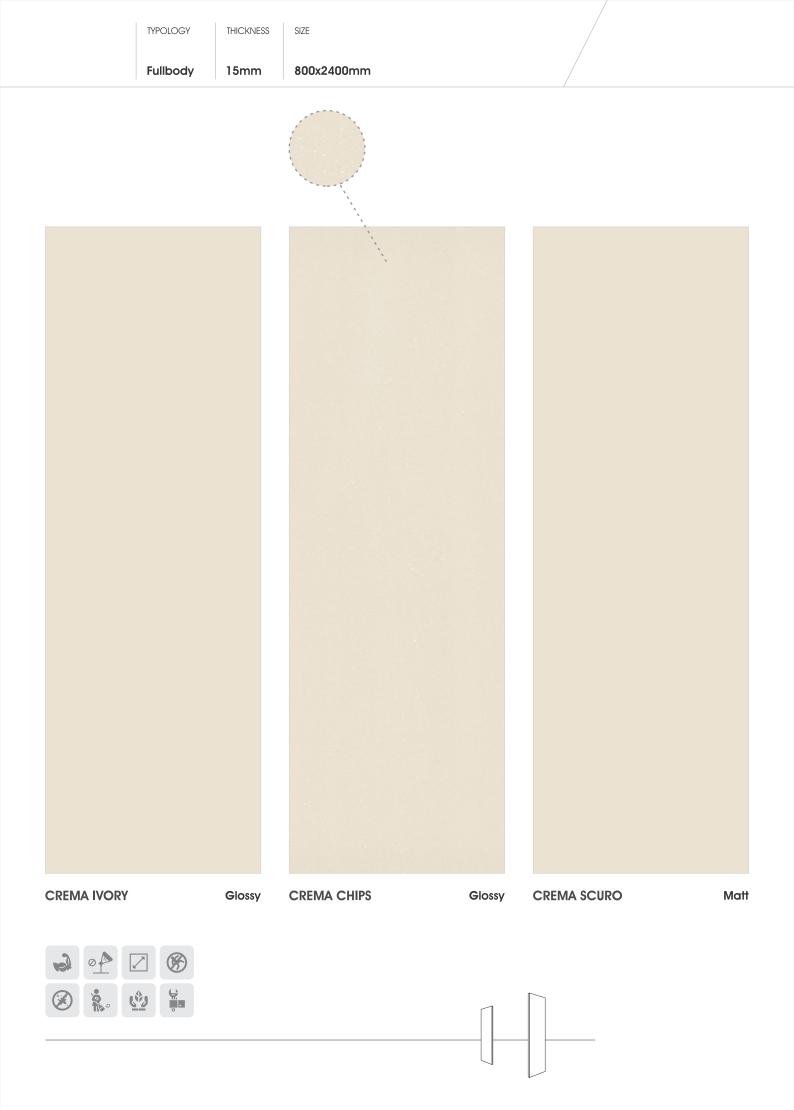


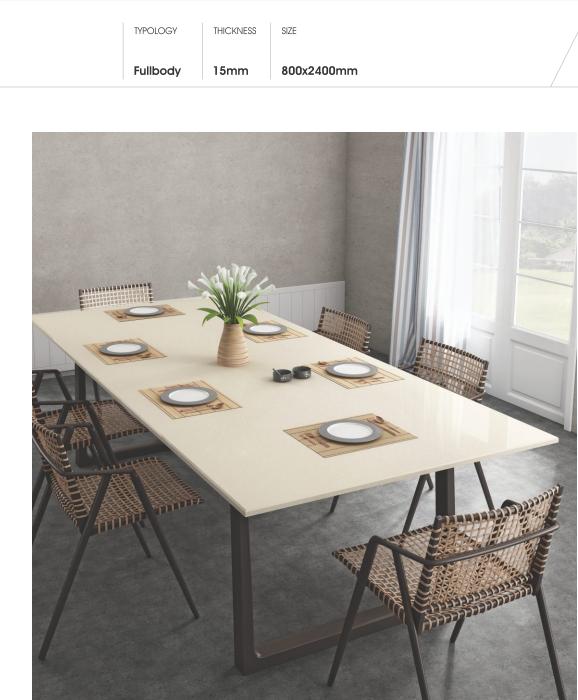



define the — perfection in every aspect

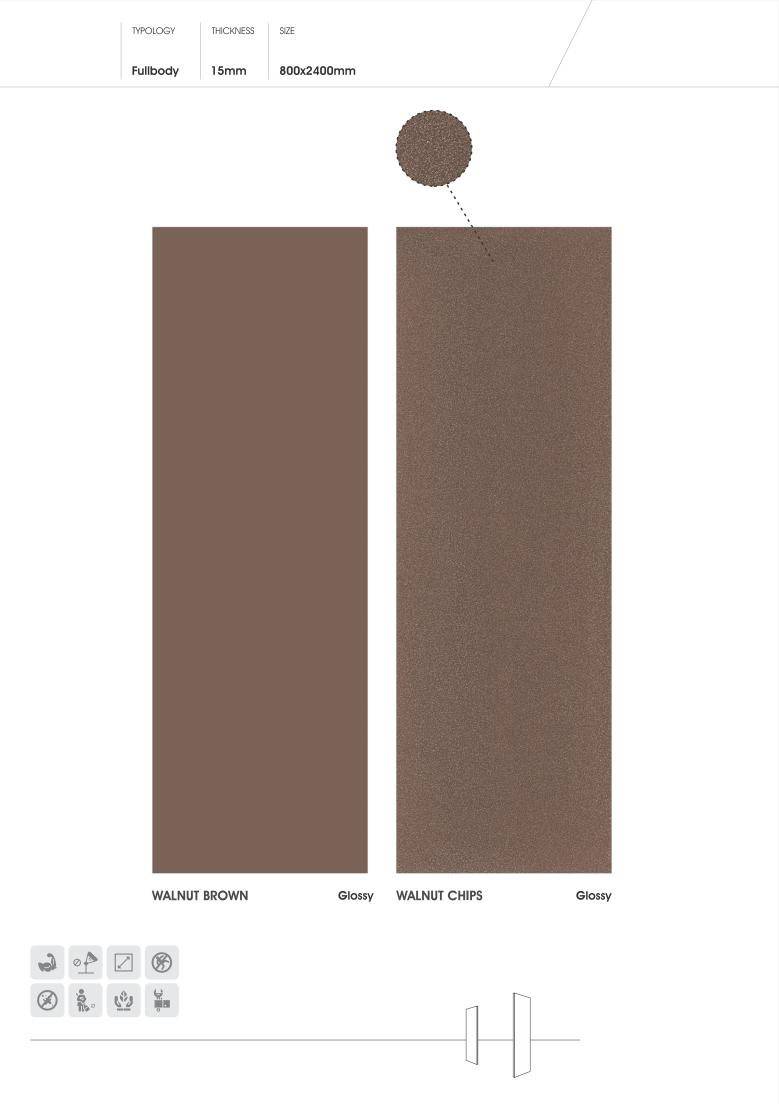

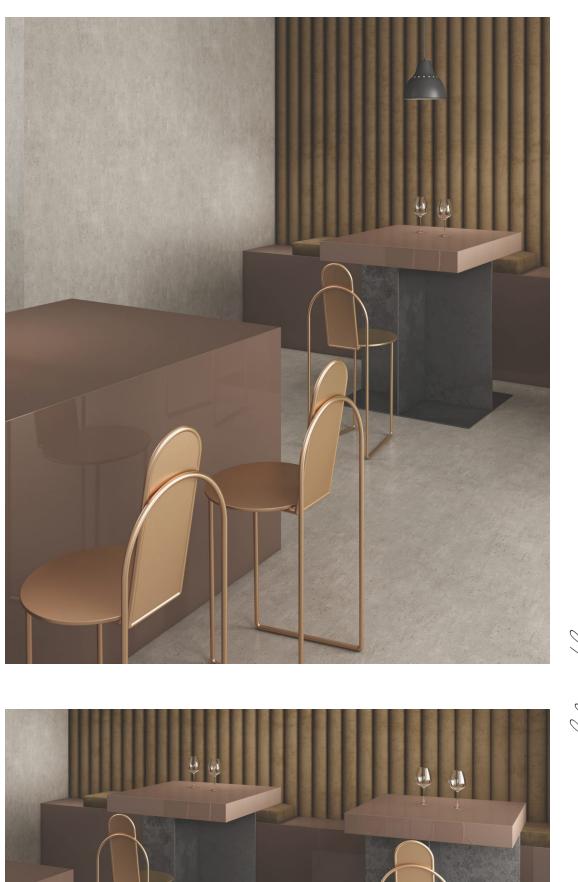


leture the — perfection in every aspect

15mm

Fullbody

800x2400mm

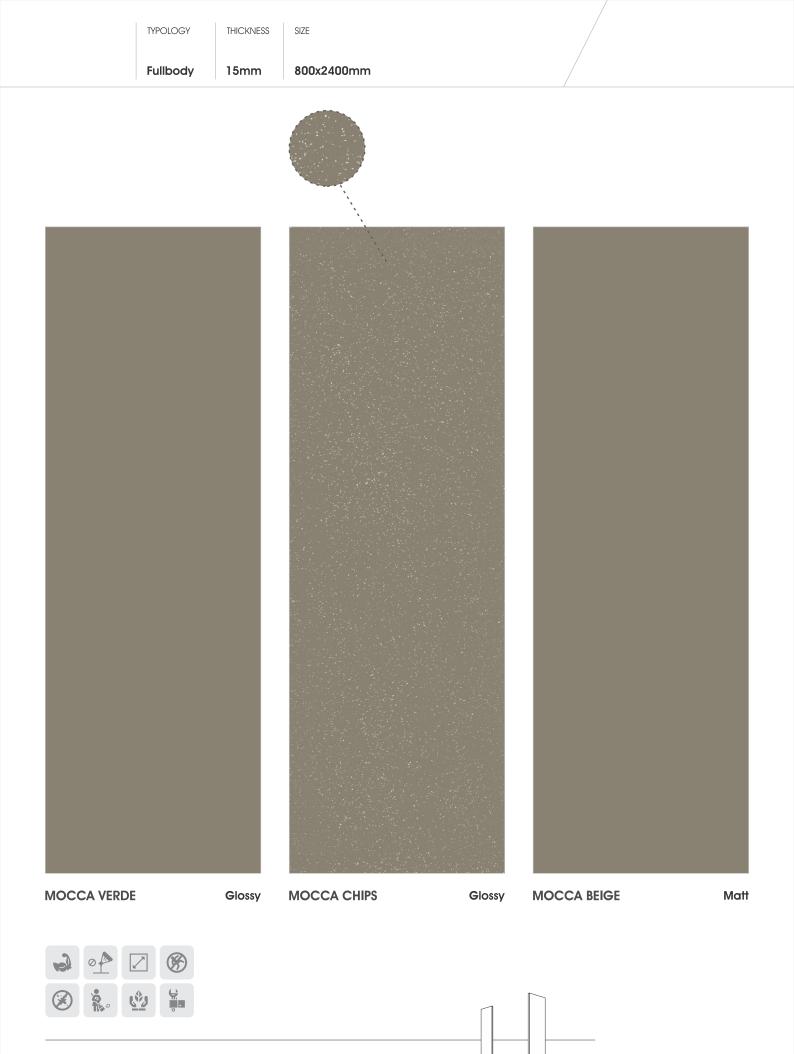


TYPOLOGY	THICKNESS	SIZE
Fullbody	15mm	800x2400mm





Mocca Chips

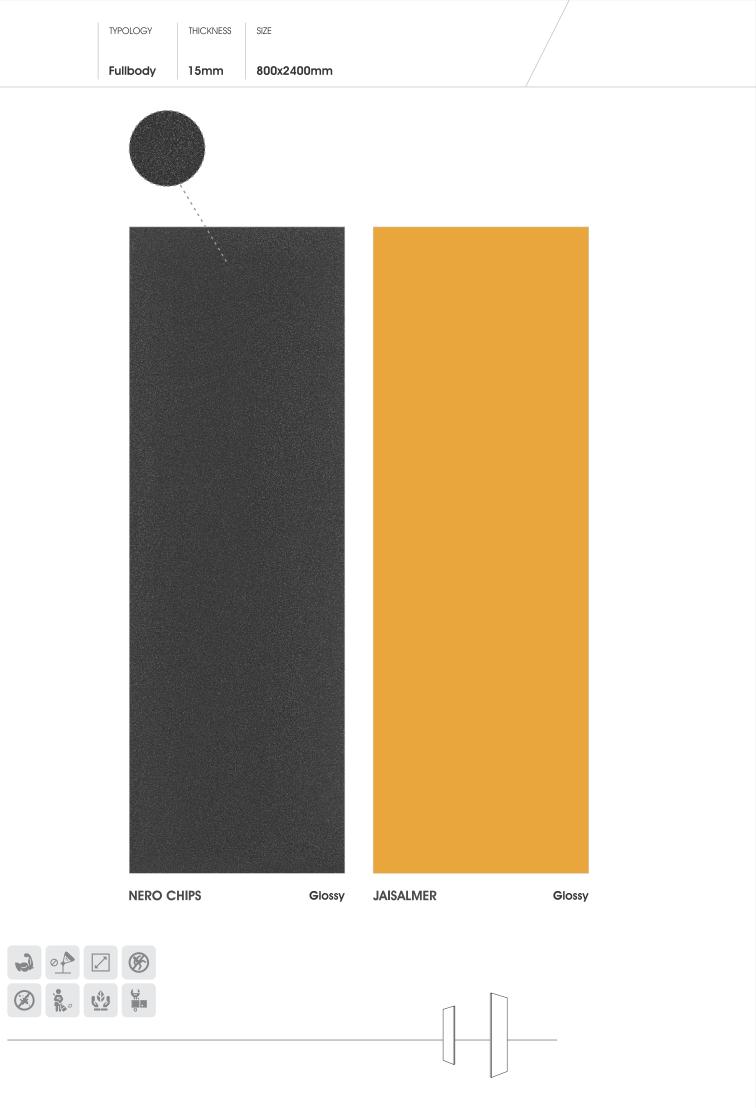



TYPOLOGY

Fullbody

THICKNESS

15mm


SIZE

800x2400mm



leture the — perfection in every aspect

TYPOLOGY	THICKNESS	SIZE	
Fullbody	15mm	800x2400mm	

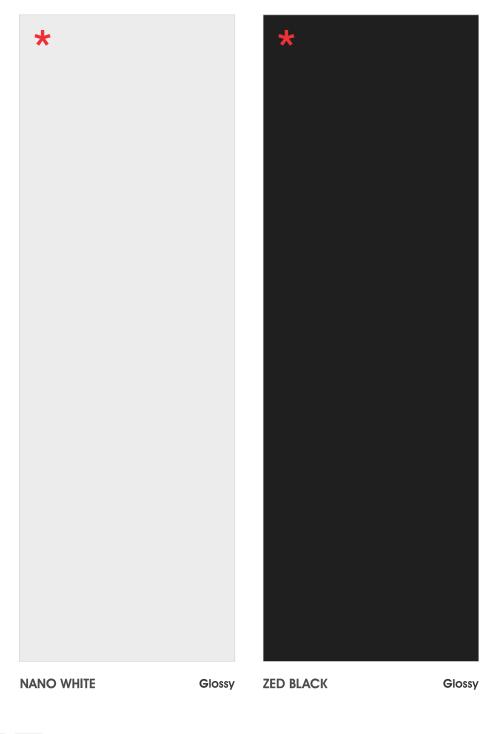



*Glazed application

TECHNICAL SPECIFICATION OF OUR FULL BODY TILE

TEST DISCRIPTION				
CHARACTERISTIC	test method	STANDARD VALUE	OUR VALUE	
Deviation in Length	ISO 10545-2	±1mm	Ave. + 0.28 mm Ave 0.00 mm	
Deviation in Width	ISO 10545-2	±1 mm	Ave. + 0.21 mm Ave 0.00 mm	
Deviation in Thickness	ISO 10545-2	± 0.5 mm	Ave. + 0.00 mm Ave 0.16 mm	
Straightness of Sides	ISO 10545-2	± 0.8 mm	Max. + 0.18 mm Max 0.20 mm	
Rectangularity	ISO 10545-2	± 0.8 mm	Max. + 0.20 mm Max 0.22 mm	
Surface Flatness	ISO 10545-2	± 1.8 mm	Max + 0.14 mm Max - 0.00 mm	
Surface Quality	ISO 10545-2	Min. 95%	Min. 99%	
	PHYSICAL PROPERTI	ES		
CHARACTERISTIC	test method	STANDARD VALUE	OUR VALUE	
Water Absorption	ISO 10545-3	0.50%	Avg. 0.0606 %	
Modulus of Rapture(N/mm2)	ISO 10545-4	min 35	Avg. 43.11 N/mm2	
Breaking Strength(N)	ISO 10545-4	>7.5mm	6270.45 N	
THERMAL SHOCK RESISTANCE 15/145.C 10cycle	ISO 10545-9	10 cycle, Min	Conform	
Co-Efficent of Linear Thermal Expansion	ISO 10545-8	9x10 6 Max	4,84x10 6	
Deep Abrasion Resistance	ISO 10545-6	Max 175mm	123mm3	
Scratch Hardness of Surface	ls-13630-13	Min 5 Moh's	5 Moh's Scal	
Bulk Density (g/cc)		2.2 Min	2.2748g/cc	
Moisture Expansion(mm/m)	ISO 10545-10	0.02mm/m max	No Expansion	
Impact Resistance-Coefficent of Restitution	ISO 10545-5	0.55 Min.	0.57 Min	
Small Colour Differences	ISO 10545-16		No Difference	
Resistance to Stain	ISO 10545-14	Min Class-3	Class-5	
Lead and Cadium Release in mg/dm2	ISO 10545-15	0.1mg/dm2	0.00mg/dm2	